

# Excavator Mulcher

For Excavators



## FEATURES:

- 36" cutting width available
- Variable displacement bent axis piston motor
- Rugged and low profile design
- Deflector door for control of particle size and discharge
- Models available to match flow range of excavators



*The Power of Combined Excellence*

# Excavator Mulcher

## Tree Stabilization Guide: (Patent Pending)

Designed to support standing trees when cutting from the top down, therefore limiting tree deflection, enhancing control and increasing productivity.


## Features:

- Hydraulic driven, belt drive designed at 200 percent of rated horsepower; low maintenance and great durability
- 5,000 PSI operating pressure
- Optional carbide hammer teeth, single and reversible teeth
- Rock teeth single and reversible and reversible claw teeth
- Balanced .75 wall drum with 2.438" alloy steel shaft
- Shreds up to 6" diameter hardwood trees
- Designed to operate at 2,000 RPM
- Rotor bearings protected by mechanical seals
- 1 year on structural frame and 6 months on the drive system (hydraulic motor, bearings, pulleys etc.)

## Options:

- Single and reversible carbide hammer teeth
- Single and reversible rock teeth
- Reversible claw teeth

Specifications	MM36E	MM36E
Order Code	112630	112705
Hydraulic Flow (GPM)	28 to 41	42 to 60
Operating Pressure (PSI)	5000	5000
A. Overall Width	48.50"	48.50"
B. Overall Height (less mount)	24.50"	24.50"
C. Overall Length	33.00"	33.00"
D. Cutting Width	36.00"	36.00"
Holder	27	27
Weight Lbs/Kg (less mount)	1450lb / 658kg	1470lb / 667kg

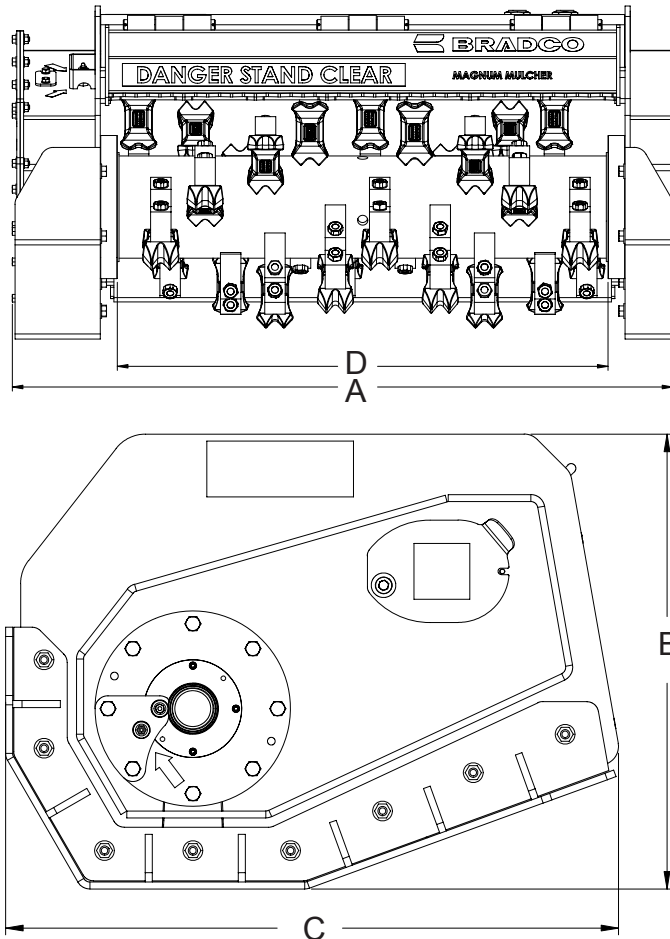

Specifications and design are subject to change without notice and without liability, therefore, whenever applicable specifications are in accordance with SAE standards.

PH: 800-456-7100

www.paladinbrands.com



The Power of Combined Excellence